

VIPA-WSCOM



- LIVE PA ANNOUNCEMENT
- IMMEDIATE DVA MESSAGE BROADCAST
- AUTOMATED DVA MESSAGE BROADCAST
- BACKGROUND MUSIC
- FAULT MONITORING
- EXPANDABLE UP TO 500 PA ZONES
- 2D MODEL
- 21.5" TOUCHSCREEN

OVERVIEW

The VIPA-WSCOM is a stand-alone PC based Public Address Touchscreen GUI which provides both control and monitoring of an ASL Public Address (PA) or Voice Alarm (VA) system. The VIPA-WSCOM is used as a graphic microphone display in conjunction with a separate microphone, such as an ASL MPS01 IP microphone (as shown above), or any other microphone from the ASL MPS range.

The VIPA-WSCOM and MPS operate together as a paging microphone, with full integration between the desk microphone and graphic display. Thus the PA zones can be selected for a broadcast either on the graphic display or using physical microphone buttons, and the PTT can be Pressed To Talk either on the graphic display or on the microphone itself. The VIPA-WSCOM also provides a background music routing function, controlling a music feed that is connected into the VIPA-WSCOM's analogue audio input.

The VIPA-WSCOM's Digital Voice Announcer functionality enables PA announcements to be made from recorded 'Digital Voice Announcer' (DVA) messages which are stored within the PC. As well as immediate broadcast functions, DVAs can be scheduled to be automatically broadcast at intervals, and new DVA messages can be recorded by the user.

Alternate chimes can be used, and the customer's own chimes can be loaded onto the unit as well.

The VIPA-WSCOM's simple and intuitive user interface enables easy and quick operation. The 2D display graphics use a standard .png image file, and normally either just show PA 'zone select' buttons, or show a customised site plan with the physical layout of the PA zones being shown on the screen. If a site plan image is shown then the area representing each zone acts as a 'zone select' button, with zone selection and announcement status being shown by different colours.

The VIPA-WSCOM is based on an All-In-One PC and touchscreen monitor, together with mouse and keyboard. One or more VIPA-WSCOM workstations can be used on a single PA system.

The VIPA-WSCOM's interface to the PA system is via a RJ45 Ethernet port. It is connected to an IP network, across which the PA audio is routed using ASL's VIPA Voice over IP technology.

Fault and status reporting is provided for the PA system, and is also provided for any third party equipment which has its fault or status contact outputs connected to the system.

1 ASL microphone supplied separately, microphones can have their own zone select buttons and can operate independently as well as with the VIPA-WSCOM

2 When fitted with the optional VIPEDIA-NET module

3 The functionality provided by the VIPA-WSCOM is dependant on the connected PA equipment

FUNCTIONALITY

The ASL iVENCs software suite as used by the VIPA-WSCOM has the primary application of providing IP-based Public Address.

The VIPA-WSCOM's simple and intuitive user interface enables quick and easy operation, and the standard functionality includes the following:

- 2D Model expandable up to 500 zones (100 as standard)
 - GUI Graphics supplied by the Customer as a .png image file or multiple layered images
- PA Subsystem
 - Up-to 500 PA Zones shown graphically on the user Interface
 - Selection of PA zones for broadcast can be made directly on the GUI, or via user-programmed group zone selection buttons
 - All PA Zone activity and zone busy states are shown graphically on the GUI, with the priority of any broadcasting source shown by means of the displayed zone colour
 - DVA Message Broadcast Scheduling
 - Broadcast of time scheduled DVA announcements
 - Preview play of recorded announcements
 - Recording, review and storage of user Digital Voice Announcer (DVA) messages
 - Pre-Installation of DVA messages
 - An Emergency Evacuation message
 - An Emergency Alert message
 - Routine Operational and Security Messages
 - Messages can be either from the ASL Standard English language message library, or as supplied by the Customer
- Monitoring and System Logs
 - PA System Status and Fault Monitoring
 - Alarm List, including standard ASL alarm priorities and descriptions
 - Event Log, showing all alarms and status changes
 - Broadcast log display and archive, including broadcast time, broadcast source and destination(s), plus live or recorded message flag, and with all message file names logged
 - PA System equipment status tree

SYSTEM CONFIGURATION


The VIPA-WSCOM can be customised to use alternate hardware or to provide numerous additional functions. Please contact ASL if you have any PA workstation requirements that are not met by the above list of standard functions. Typical functionality which can be supplied as custom options on the VIPA-WSCOM is as follows:

- Ability to listen in to the broadcasts being made in any PA zone
- Muting of routine advertising and security DVA messages into individual PA zones
- Multiple graphical GUI screens, to show different building floors or areas
- Expandable Zone display upto 500 Zones

Custom options are priced as additional items, please contact ASL for pricing.

Other functionality is also available with a full upgrade into an iVENCs Control System workstation. The VIPA-WSCOM's interface to the PA system is via a RJ45 Ethernet port. It is connected to an IP network, across which the PA audio is routed using ASL's VIPA Voice over IP technology.

EXAMPLE GUI

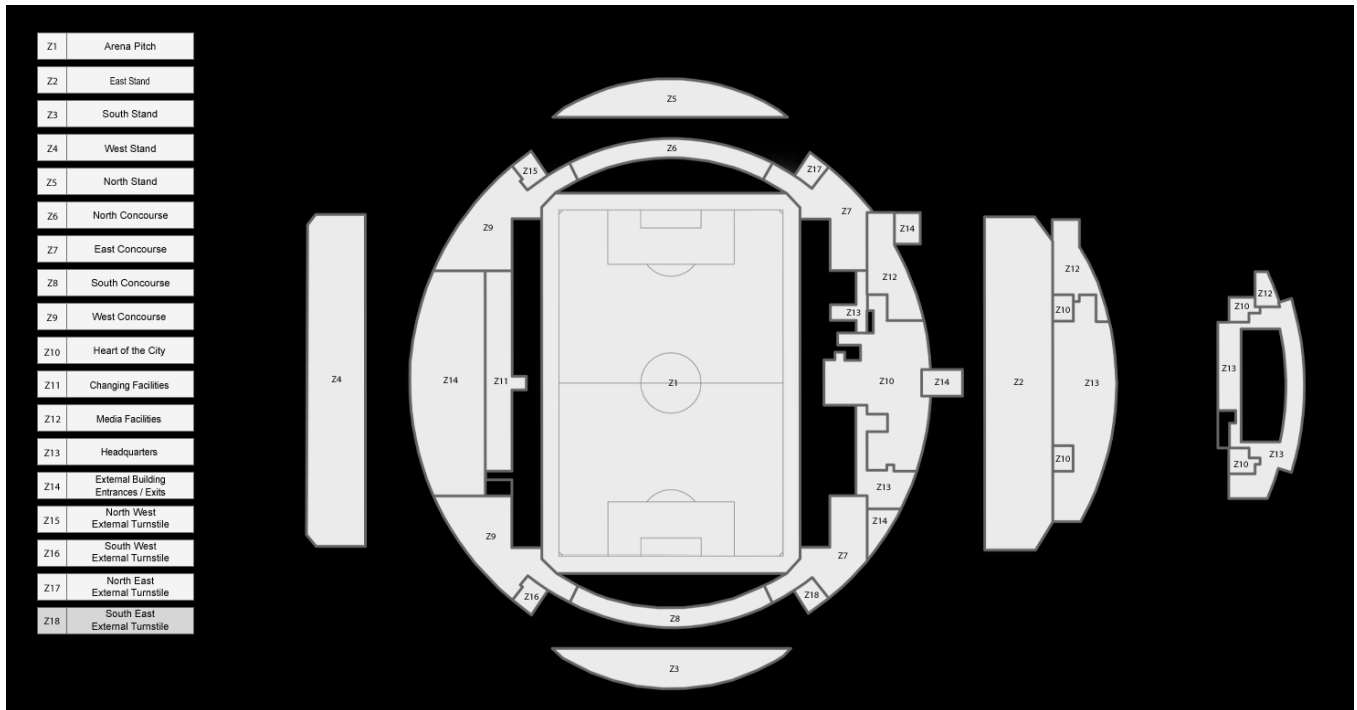

Example 2D Model

Type	Name	Lang	Text
📢	401 - Emergency Alert	🇬🇧	This is an emergency announcement. The fire alarm system has been activated. Ple
📢	402 - Emergency Evacuation	🇬🇧	This is an emergency announcement. The station fire alarm has been activated. Ple
📢	403 - Security Threat	🇬🇧	This is an emergency announcement. Please leave the station immediately. /In ad
📢	404 - Emergency services	🇬🇧	Attention please. The emergency services are in attendance at this station, please m
📢	405 - Unwell passenger	🇬🇧	Attention please. Ambulance crews are in attendance at this station. Please make
📢	406 - Death on track	🇬🇧	Attention please. There has been a fatality on the line. Please keep clear of the plat
📢	407 - Collision	🇬🇧	Attention please. There has been a collision on the line. Please keep clear of the plat

2D GUI and PA functions example

CONNECTIVITY

The VIPA-WSCOM will work with the whole ASL VIPA PA range, including the VIPEDIA IP Audio Router, and the iPAM400 IP PA Amplifier. The VIPA-WSCOM can also operate with ASL VAR Routers and with third party systems via ASL VIPA-HOST IP interface units, or by using the VIPEDIA-12 as an audio and control interface unit:

- Full integration with ASL PA Equipment
 - Control any or all PA subsystems from any touchscreen / workstation on the network
 - Established VoIP PA System
 - Excellent Long Line PA performance
 - Voice Alarm Heritage
 - High reliability
 - Fully monitored audio signal path
 - High fault reporting
- Can also integrate with third party PA systems
 - Via ASL VIPA-HOST or VIPET IP interface units
 - Or directly, with the other PA equipment running the ASL VIPA SDK

The VIPA-WSCOM is supplied as standard with a configuration for up to 100 buttons or 1 layer 2D image.

Any other variations of ASL or third party PA equipment may be connected as options on the base VIPA-WSCOM unit. For increases from the standard configuration or variations of the above, please contact ASL.

NETWORK REQUIREMENTS

Live voice audio streaming is provided across the IP network to the PA equipment, with the transmissions being sent using standard IPV4 UDP multicast with IGMPv3. The use of multicast transmissions allows multiple PA units to receive to a single stream of data, and thus minimising the network transmission bandwidth.

TECHNICAL SPECIFICATION

Connection to IP Network

Connection to IP Network.....100BASE-T Ethernet
 Audio.....VoIP audio

Live Announcement

Default Maximum Microphone Broadcast Length.....60 s

DVA Message

Default Maximum Message Length.....60 s
 Pre-Recorded DVA Message Format (Preferred)
 File Format.....WAV
 Sample Rate.....48 kHz
 Bit Depth.....16 bits

Graphic Zone Image File Format

File Format.....PNG
 Image Size.....960 pixels wide * 640 pixels high

Touchscreen PC (Standard VIPA-WSCOM Hardware)

LCD.....21.5 inch 1920*1080 widescreen Touchscreen TFT display
 Power Supply.....100-240 V AC
 LAN.....1 off 10/100BASE-T

Product Part Numbers

VIPA-WSCOM.....iVENCS Public Address Control Workstation

Option Part Numbers

VIPA-TTS-EN.....English Language Text to Speech system (Installed Option)

The functionality which is available in any one installation depends on the connections used and on the other equipment used in that installation.



This equipment is designed and manufactured to conform to the following EU Directives:

Restriction of Hazardous Substances (RoHS): 2011/65/EU & 2015/863/EU

Low Voltage: 2014/35/EU

Electromagnetic Compatibility (EMC): 2014/30/EU

Contact ASL for details

Manufacturer
 Application Solutions (Safety and Security) Limited
 Unit 17 - Cliffe Industrial Estate - Lewes - East Sussex - BN8 6JL - U.K.
 Tel: +44(0)1273 405411
www.asl-control.co.uk



Assessed to ISO 9001
 LPCB Cert No: C1043



Assessed to ISO 14001
 LPCB Cert No: C1043EMS